



IM-1100 Ice Cube Machine

Models

☐ IM-1100-AC ☐ IM-1100-AH ☐ IM-1100-WC ☐ IM-1100-WH ☐ IM-1100-RC ☐ IM-1100-RH



ICETRO IM-1100 ice machine
on a IB-044 bin

*Ice Machine and Bin sold separately

Bin Adapter IBT-3048B
Center Mount 48" Bin

Ice Shape



Half Cube
 $\frac{3}{8}" \times 1\frac{1}{8}" \times \frac{7}{8}"$
(.95 x 2.86 x 2.22 cm)



Cube
 $\frac{7}{8}" \times \frac{7}{8}" \times \frac{7}{8}"$
(2.22 x 2.22 x 2.22 cm)

Factory Warranty

Parts & Labor	Parts	Parts
3 YR	5 YR	5 YR
Ice Maker	Evaporator	Compressor



Extend ice machine warranty 1 year by
installing an IcePro 1300 with ice machine.

* Applies only to new ice machines, at the
time of original installation & start-up.

- Up to 1,106 lbs production capacity (70F/50F, 24 Hours)
- 304 stainless-steel exterior (durable & rust-resistant)
- Simple diagnostic panel to assist service & maintenance
- Cleaning switch for auto cleaning cycle
- Magnetic frame cleanable condenser air filters
- Adjustable flush time to reduce scale & cleaning cost
- ABS antimicrobial interior to reduce slime & cleaning cost
- Water distributor tube & water sump removed w/o tools
- Heavy duty water curtain, pins & hangers for easy removal
- Hinged front doors for easy access
- No screws on side or back panels for easy access
- Side & top vents for optimal ventilation
- Improved evaporator section to reduce airborne bacteria
- R-404A refrigerant

Specifications

BTU Per Hour: 26,910

Refrigerant: R404A

- Ambient Temperature Range:
50° to 100°F (10° to 37°C)
- Ambient Temperature Range
for remote condenser IRC-1100:
-5° to 117°F (-20° to 47°C)
- Water Temperature Range:
50° to 90°F (10° to 32°C)
- Potable Water Pressure: Min.
20 psi (137.9 kPa) Max. 80
psi (551.1 kPa)
- Condenser Water Pressure:
Min. 20 psi (1.38 bar) Max.
150 psi (10.34 bar)

Ice Machine Electric

208-230/60/1

Minimum circuit ampacity:

Air-cooled:	15.6 <i>1ph</i>
Water-cooled:	15.6 <i>1ph</i>
Remote:	15.6 <i>1ph</i>

Maximum fuse size:

Air-cooled:	25 <i>1ph</i>
Water-cooled:	25 <i>1ph</i>
Remote:	25 <i>1ph</i>

Accessories

Refrigeration Line Set

IRT-20R404	20'	line	set
IRT-35R404	35'	line	set
IRT-50R404	50'	line	set



**Remote Con-
denser IRC-1100**
(sold separately
for RC/RH models)



Bin-Stat Kit IBO-150KIT

Recommended when
ice machine is
installed on soda
dispenser.



Water Filtration IcePro 1300




Reduces sediment and
chlorine contaminants
with the use of Citrine.







IM-1100 Ice Cube Machine




IM-1100 Air Cooled

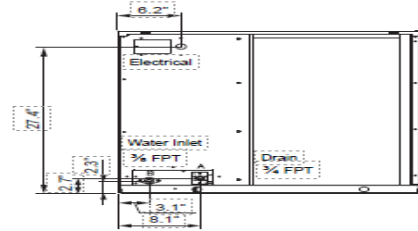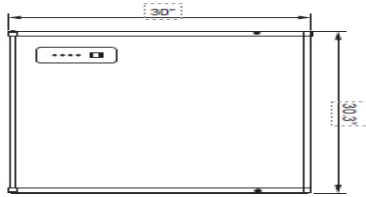

IM-1100 Water Cooled

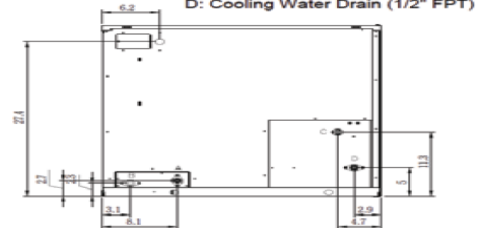

IM-1100 Remote Cooled

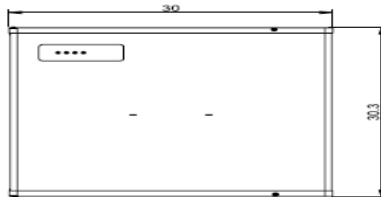


FRONT

SIDE

BACK

PLAN VIEW IRC-1100 condenser,
back view, side and front

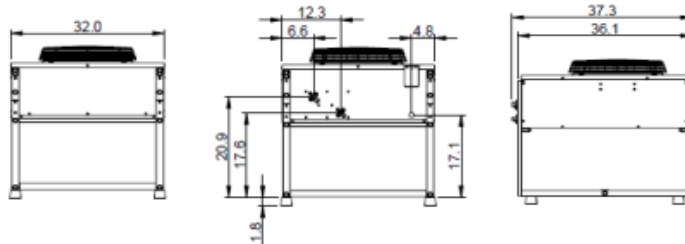

Specifications

Dimensions	Width	Depth	Height	Weight
IM-1100 Machine	30"	24.8"	30.3"	231.5 lbs (Net) 262 lbs (Shipping)
IRC-1100 Condenser	22.6"	35.6"	27.1"	80 lbs (Net) 105 lbs (Shipping)

	Model	Ice Shape	Ice Production 24 Hours		Power Usage kWh/100 lbs. @90° Air/70°F	Potable Water Usage/100 lbs. 45.4 kgs. of Ice*
			70° Air/ 50°F Water	90° Air/ 70°F Water		
AIR COOLED	IM-1100-AC	cube	1 ph	1 ph	1 Ph	
			1106 lbs	875 lbs	4.99	14 Gal.
	IM-1100-AH	half-cube	501 kgs	397 kgs		14 Gal.
			1106 lbs	875 lbs	4.99	14 Gal.
WATER COOLED	IM-1100-WC	cube	501 kgs	397 kgs		14 Gal.
			1036 lbs	1004 lbs	4.13	14 Gal.
	IM-1100-WH	half-cube	470 kgs	455 kgs		14 Gal.
			1036 lbs	1004 lbs	4.13	14 Gal.
REMOTE COOLED	IM-1100-RC	cube	470 kgs	455 kgs		14 Gal.
			1081 lbs	949 lbs	4.72	15 gal
	IM-1100-RH	half-cube	490 kgs	430 kgs		15 gal
			1081 lbs	949 lbs	4.72	15 gal

RC-1100 vertical discharge condenser order separately for Remote cooled units



*Water-cooled condenser
uses 165.7 gal/100 lbs. of ice

